

Flow rate sensors for fluid media with an end value of 10...100 l/min | SDNB 552/4 GAPL

- Flow rate sensor with IO-Link
- Flow and temperature measurement
- for waterbased media
- Process data can also be used for remote maintenance
- Analog and switching output in SIO-mode available
- Detection range temperature: 0...60° C
- Detection range flow: **5...100 l/min** - process connection: **G3/4**




TYPE	SDNB 552/4 GAPL
Product ID	P11436
Medium	waterbased media
Detection range water	5 ... 100 l/min
Temperature monitoring	0 ... 60 °C
Inner diameter d	19 mm
Process connection	G3/4
Output	analog output 4...20 mA, IO-Link, switching output
Output function	PNP-NO / NC
Process data flow	0...1000 (l/min x 0,1)
Process data temperature	0...600 [°C x 0,1]
Supply voltage	18 ... 30 VDC
Current consumption max.	40 mA
Ambient temperature	0 ... 60 °C
Medium temperature	0 ... 60 °C
Reaction time typ.	1 ... 8 s
Programmable functions	range, teach-commandos, window, time on/off delay, averaging, switching output
IO-Link-Specifications	revision 1.1, baud rate COM 2, min. cycle time 3.5 ms, process data 4 byte

Compressive strength	10 bar
Material sensor touched by medium	stainless steel AISI 316 Ti
Material housing	PBT-GF30
Protection [EN 60529]	IP 65
Electrical connection	M12 connector

Accessories IO-Link/USB-Master-Set (Z01216)

Technical Image

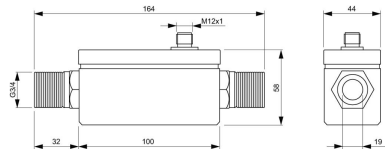

Pin Map

