

Filling level monitor with optical measuring principle | UFS 075 GSOP-L060

- Optical filling level monitor with resistant glass tip for the reliable monitoring of the maximum or minimum filling level of fluids
- Detects fluids with a very low DK values, such as oil Resistant to detergents, hydraulic and lubrication oil
- The medium changes the refractive index at the sensor tip and thus triggers a switching signal upon touching




G3/4 - sensor length 60 mm - Output PNP NC + NO

TYPE	UFS 075 GSOP-L060
Product ID	P21209
Sensor length L	60 mm
Output	switching output
Supply voltage	10 ... 33 VDC
Current consumption max.	10 mA
Short circuit proof	yes
Overcurrent release	250 mA
Reverse polarity protection	✓
Voltage drop max.	2 V
Switching frequency	5 Hz
Ambient temperature	-25 ... 70 °C
Compressive strength (at 25°C)	16 bar
EMC-class	A
Material sensor touched by medium	stainless steel AISI 316 Ti, PES
Material housing	stainless steel AISI 316 Ti
Seal material	FPM
Protection [EN 60529]	IP67
Electrical connection	M12 connector

Accessories

connecting cable SLW 4-2 LED (Z01157)

Technical Image

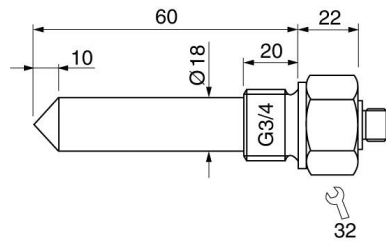

Pin Map

