

INKS 020 GPP


- Inductive proximity switches for industry and automation
- Good value for money Sensors
- With smooth plastic sleeve
- Customer-specific adaptations
- For the detection of metallic objects
- Presence detection
- Position and movement monitoring
- Object counting and
- Speed control on conveyor belts



Ø34 mm - sn 20 mm non flush - Output PNP programmable

TYPE	INKS 020 GPP
Product ID	P30165
Operating Distance sn	20 mm non-flush
Output	switching output
Supply voltage	10 ... 55 VDC
Current consumption max.	2.5 mA
Switching current max.	400 mA
Short circuit proof	yes
Overcurrent release	450 mA
Reverse polarity protection	✓
Voltage drop max.	2 V
Switching frequency	500 Hz
Ambient temperature	-25 ... 75 °C
EMC-class	A
Material housing	PBT
Material cap	PBT
Display	✓
Protection [EN 60529]	IP 67
Electrical connection	2 m PVC-cable 3x0.5 mm ²

Technical Image

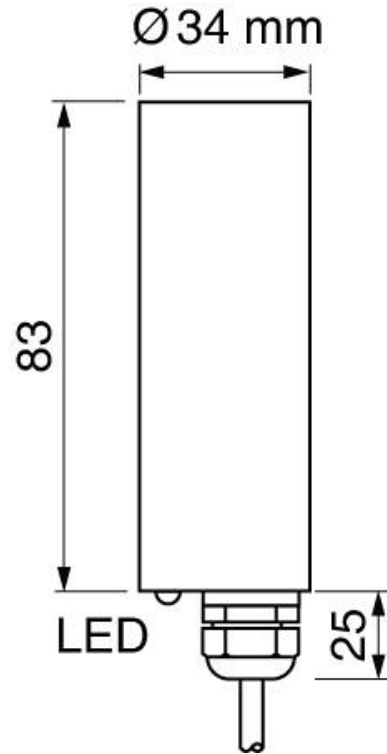

Pin Map

