

Specially sealed sensors - climatic proofed for use in a temperature range up to 120°C | IGMW 015 GSOP


- For use at temperatures up to 120°C
- Climatic proofed Water-tight and resistant to high pressure cleaning
- Particularly resistant to steam
- For use in cleaning processes
- For use in cooking processes



**M30x1.5 - sn 15 mm non flush - Output PNP NC
+ NO**

TYPE	IGMW 015 GSOP
Product ID	P31355
Thread/sleeve	M30x1,5
Operating Distance sn	15 mm non-flush
Output	switching output
Supply voltage	10...30 VDC
Current consumption max.	4 mA
Residual current	1
Overcurrent release	230 mA
Voltage drop max.	2 V
Switching frequency	1000 Hz
Ambient temperature	-25 ... 120 °C
EMC-class	A
Material housing	stainless steel AISI 316 Ti, stainless steel, PTFE
Material thread	stainless steel AISI 316 Ti (A4)
Material cap	PTFE
Protection [EN 60529]	IP 68 + IP 69K
Electrical connection	2 m FEP-cable 4x0.25 mm ²

Technical Image

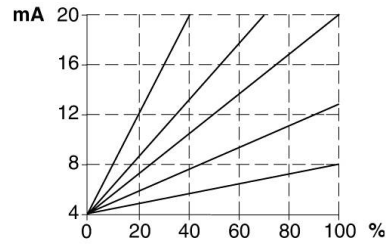

Pin Map

