

Specially sealed sensors - climatic proofed for use in a temperature range up to 120°C | IGMF 010 GSP-PZ


- Armoured cable for connection box GS
- Resistant to roller oil
- Easily replaceable using robust connection box and plug contacts for use at temperatures up to 120°C
- For use in environments with seeping aggressive oil/lubricants
- For use in the steel industry



M30x1.5 - sn 10 mm flush - Output PNP NO

TYPE	IGMF 010 GSP-PZ
Product ID	P31443
Thread/sleeve	M30x1,5
Operating Distance sn	10 mm flush
Output	switching output
Output function	PNP-NO
Supply voltage	0 ... 0 VDC
Current consumption max.	4 mA
Switching current max.	200 mA
Switching frequency	1000 Hz
Ambient temperature	-25 ... 120 °C
EMC-class	A
Material housing	stainless steel AISI 316 Ti, stainless steel, PTFE
Material thread	stainless steel AISI 316 Ti (A4)
Material cap	PTFE
Display	✓
Protection [EN 60529]	IP 68 + IP 69K
Electrical connection	armoured cable

Technical Image

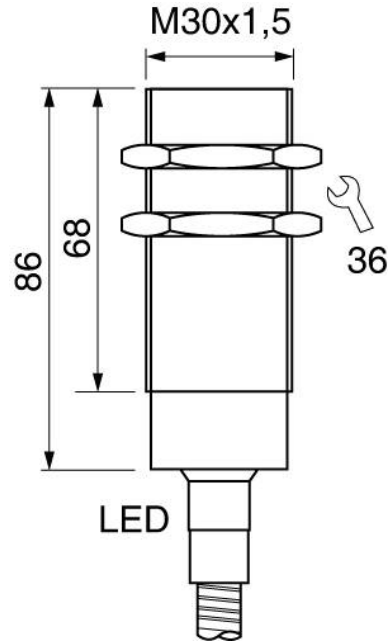

Pin Map

