


DN 752 GA-01

- Programmable pressure sensors with digital display
- For smart pressure control in processes
- Analogue output
- Rapid adjustment of two switching outputs, limit values, hysteresis



TYPE	DN 752 GA-01
Product ID	P72016
Pressure (relative)	0 ... 1 bar
Process connection	G3/4
Output	analog output 4...20 mA
Supply voltage	24 VDC +/- 20 %
Current consumption max.	50 mA
Load resistance RL	200 ... 500 Ω
Ambient temperature	-20 ... 70 °C
Medium temperature	-20 ... 80 °C
Compressive strength (at 25°C)	5 bar
Material sensor touched by medium	stainless steel AISI 316 Ti
Material gauge head	ceramic
Material housing	PBT
Seal material	FPM
Protection [EN 60529] housing	IP 65
Electrical connection	M12 connector
Accessories	Anschlusskabel SLG 3-2 (Z01076)

Technical Image

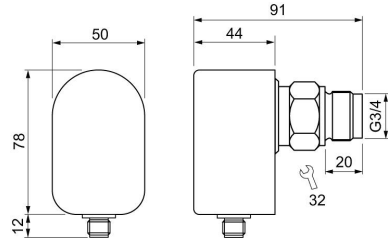

Pin Map

