


## DN 752 GA-16

- Programmable pressure sensor 0...16 bar with digital display
- For smart pressure control in processes
- Pressure sensor for pressures from 0...16 bar relative
- analog output



<b>TYPE</b>	DN 752 GA-16
<b>Product ID</b>	P72017
<b>Pressure (relative)</b>	0 ... 16 bar
<b>Process connection</b>	G3/4
<b>Output</b>	analog output 4...20 mA
<b>Supply voltage</b>	24 VDC +/- 20 %
<b>Current consumption max.</b>	50 mA
<b>Load resistance RL</b>	200 ... 500 Ω
<b>Ambient temperature</b>	-20 ... 70 °C
<b>Medium temperature</b>	-20 ... 80 °C
<b>Compressive strength (at 25°C)</b>	48 bar
<b>Material sensor touched by medium</b>	stainless steel AISI 316 Ti
<b>Material gauge head</b>	ceramic
<b>Material housing</b>	PBT
<b>Seal material</b>	FPM
<b>Protection [EN 60529] housing</b>	IP 65
<b>Electrical connection</b>	M12 connector
<b>Accessories</b>	Anschlusskabel SLG 3-2 (Z01076)

Technical Image

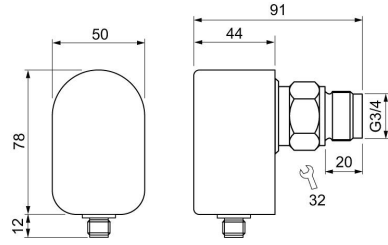

Pin Map

