

Sensors with integrated amplifier | SNT 450/1-A4-GR

- Screw-in sensor for flow monitoring
- Robust, compact design
- With switching or analogue output
- Flow monitoring in rough and corrosive environments with heightened requirements for the stability and durability of a device




G1/2 - sensor length 48 mm - 24 VDC - output relay - 2 m PVC cable

TYPE	SNT 450/1-A4-GR
Product ID	P11222
Medium	Water, oil
Detection range water	1 ... 150 cm/s
Detection range Oil	3 ... 300 cm/s
Temperature monitoring	-20 ... 80 °C
Process connection	G1/2
Sensor length L	48 mm
Output	switching output
Output function	relay
Supply voltage	24 VDC +/- 20 %
Current consumption max.	80 mA
Switching voltage max.	250 VAC / 60 VDC
Switching current max.	4 A AC / 4 A DC
Switching power max.	500 VA / 60 W
Reverse polarity protection	✓
Ambient temperature	-20 ... 70 °C
Medium temperature	-20 ... 80 °C
Temperature gradient fluids	250 K/min
Start-up time typ.	8 s (2 ... 15 s)
Reaction time typ.	2 s (1 ... 13 s)

Compressive strength	100 bar
Material sensor touched by medium	stainless steel AISI 316 Ti
Material housing	PBT, PVC
Display flow	LED-Array
Display	LED
Protection [EN 60529]	IP 65
Electrical connection	2 m PVC-cable 6x0.5 mm ²
Accessories (in scope of delivery)	2 x gasket G1/2 AFM 34, screwdriver

Note with longer cable available on request

Technical Image

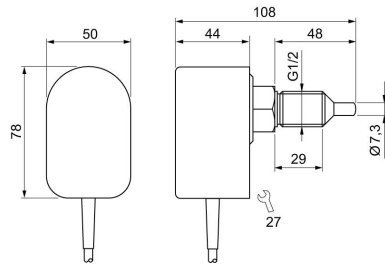

Pin Map

