

Sensors with integrated amplifier | SNT 450/1-A4-GSP-S

- Screw-in sensor for flow monitoring
- Adjustable temperature monitoring
- Intuitive switching point setting using a potentiometer
- With switching or analogue output
- Flow monitoring in rough and corrosive environments




G1/2 - sensor length 48 mm - 24 VDC - PNP NO - M12 plug system

TYPE	SNT 450/1-A4-GSP-S
Product ID	P11225
Medium	Water, oil
Detection range water	1 ... 150 cm/s
Detection range Oil	3 ... 300 cm/s
Temperature monitoring	-20 ... 80 °C
Process connection	G1/2
Sensor length L	48 mm
Output	switching output
Output function	PNP-NO
Supply voltage	24 VDC +/- 20 %
Current consumption max.	60 mA
Switching current max.	200 mA (20 °C) each output
Reverse polarity protection	✓
Voltage drop max.	2.5 V
Ambient temperature	-20 ... 70 °C
Medium temperature	-20 ... 80 °C
Temperature gradient fluids	250 K/min
Start-up time typ.	8 s (2 ... 15 s)
Reaction time typ.	2 s (1 ... 13 s)
Compressive strength	100 bar

Material sensor touched by medium	stainless steel AISI 316 Ti
Material housing	PBT
Display flow	LED-Array
Display	LED
Protection [EN 60529]	IP 65
Electrical connection	M12 connector
Accessories (in scope of delivery)	2 x gasket G1/2 AFM 34, screwdriver

Technical Image

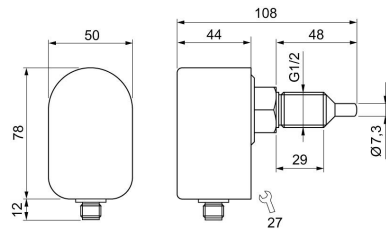

Pin Map

