

Sensors with integrated amplifier | SCS 440-A4-GSP

- M18x1,5 plug-in sensor for flow monitoring in liquid media
- Corrosion-proof stainless steel housing AISI 316 Ti
- Immersion depth 47 mm
- LED line for flow status
- M12 plug system
- PNP-NO switching output
- Adjustment with potentiometer
- Plug-in Installation




M18x1,5 - sensor length 47 mm - PNP-NO

TYPE	SCS 440-A4-GSP
Product ID	P11352
Medium	Water, oil
Detection range water	1 ... 150 cm/s
Detection range Oil	3 ... 300 cm/s
Process connection	M18x1,5
Sensor length L	47 mm
Output	switching output
Output function	PNP-NO
Supply voltage	24 VDC +/- 20 %
Current consumption max.	70 mA
Switching current max.	400 mA (20 °C)
Reverse polarity protection	✓
Ambient temperature	-20 ... 80 °C
Medium temperature	-20 ... 80 °C
Temperature gradient fluids	250 K/min
Start-up time typ.	8 s (2 ... 15 s)
Reaction time typ.	2 s (1 ... 13 s)
Compressive strength	100 bar
Material sensor touched by medium	stainless steel AISI 316 Ti, FPM

Material housing	stainless steel AISI 316 L
Protection [EN 60529]	IP 67
Electrical connection	M12 connector
Accessories	connecting cable SLG 3-2, SLG 3-5, SLW 3-2, SLW 3-5
Accessories (in scope of delivery)	screwdriver

Technical Image

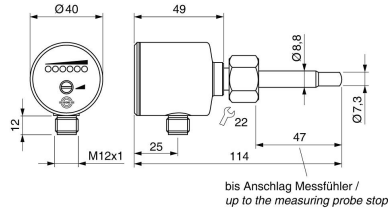

Pin Map

