

Amplifier for Detector coils | MDV 3220 GR

- Analysis unit for metal detector system 3000
- For the protection of cutters, grinders, rollers or crushers against metal parts
- Automatic regulation adaption
- With sensitivity adjustment knob
- Test button




24 V DC - relay changeover

TYPE	MDV 3220 GR
Product ID	P81061
Output	switching output
Output function	relay
Supply voltage	24 VDC +/- 10 %
Current consumption max.	100 mA
Switching voltage max.	250 VAC / 220 VDC
Switching current max.	2 A DC, 1 A AC
Switching power max.	1000 VA / 60 W (cos φ = 1)
Ambient temperature	-25 ... 70 °C
EMC-class	A
Material housing	aluminum
Display	LED
Protection [EN 60529]	IP 67
Electrical connection	2 m PVC-cable 7x0.5 mm ²

Note

With the potentiometer it is possible to adjust the sensitivity. The amplifier MDV 3220 has a relay-change over-function. During metal detection, the relay is activated and contact 4-5 is closed (2-5 is open)., By pushing the test button it is possible to test the complete function of the MDV 3220.

Technical Image

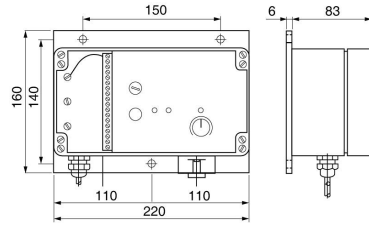

Pin Map

